


摩托车链 Motorcycle chains

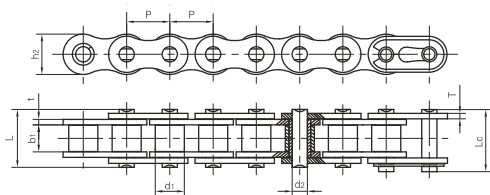


| Vision Chain No. | 节距 | 滚子直径 | 内节内宽 | 销轴直径 | 销轴长度 | | 内链板高度 | 链板厚度 | 极限拉伸载荷 | 平均拉伸载荷 | 每米长重 |
|------------------|--------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------|--------|------|
| | P | d1 | b1 | d2 | L | Lc | h2 | t/T | Q | Qe | q |
| | mm | max mm | min mm | max mm | max mm | max mm | max mm | max mm | min kN/LB | kN | kg/m |
| *25H | 6.350 | 3.30 | 3.18 | 2.31 | 8.90 | 9.5 | 6.00 | 1.04 | 4.80/1091 | 5.5 | 0.17 |
| *25H(E) | 6.350 | 3.30 | 3.18 | 2.31 | 8.90 | 9.5 | 6.00 | 1.04 | 5.80/1305 | 6.0 | 0.18 |
| *219H | 7.774 | 4.59 | 5.00 | 3.01 | 11.90 | 12.7 | 7.40 | 1.2/1.04 | 6.60/1500 | 7.4 | 0.28 |
| *270H | 8.500 | 5.00 | 4.75 | 3.28 | 13.15 | | 8.45 | 1.8/1.4 | 9.80/2227 | 11.0 | 0.33 |
| *219HF1 | 7.785 | 4.60 | 4.50 | 3.28 | 13.00 | | 7.00 | 2.0/1.40 | 9.0/2024 | 9.8 | 0.37 |
| *T3F | 9.525 | 6.00 | 9.50 | 4.50 | 18.60 | | 9.30 | 1.85/1.50 | 11.80/2682 | 14.1 | 0.61 |
| 420 | 12.700 | 7.77 | 6.25 | 3.96 | 14.70 | 16.1 | 12.00 | 1.50 | 16.00/3636 | 18.1 | 0.55 |
| 420F3 | 12.700 | 7.77 | 6.40 | 3.96 | 15.00 | 18.6 | 11.80 | 1.6/1.45 | 16.00/3636 | 18.1 | 0.64 |
| 420H | 12.700 | 7.77 | 6.25 | 3.96 | 17.00 | 18.4 | 12.00 | 2.03 | 16.00/3636 | 18.1 | 0.76 |
| 428 | 12.700 | 8.51 | 7.75 | 4.45 | 16.70 | 18.2 | 11.80 | 1.60 | 18.0/4091 | 20.1 | 0.70 |
| 428H | 12.700 | 8.51 | 7.85 | 4.45 | 18.80 | 19.9 | 11.80 | 2.03 | 20.60/4682 | 23.4 | 0.79 |
| 428F1 | 12.700 | 8.51 | 7.94 | 4.50 | 16.70 | 18.05 | 11.80 | 1.60 | 17.15/3858 | 20.1 | 0.71 |
| 428DS | 12.700 | 8.51 | 7.94 | 4.45 | 17.90 | 19.3 | 12.00 | 1.85 | 18.62/4232 | 21.0 | 0.76 |
| 520 | 15.875 | 10.16 | 6.25 | 5.08 | 17.50 | 19.0 | 15.09 | 2.03 | 26.50/6022 | 29.7 | 0.89 |
| 520F2 | 15.875 | 10.16 | 6.35 | 5.24 | 17.50 | 19.05 | 15.09 | 2.03 | 26.50/6022 | 29.7 | 0.97 |
| 520F3 | 15.875 | 10.16 | 6.48 | 5.08 | 17.50 | 19.0 | 15.09 | 2.03 | 26.50/6022 | 29.7 | 0.89 |
| 520H | 15.875 | 10.16 | 6.25 | 5.08 | 19.30 | 20.8 | 15.09 | 2.42 | 26.50/6022 | 31.5 | 1.10 |
| 525 | 15.875 | 10.16 | 7.95 | 5.08 | 19.30 | 20.7 | 15.09 | 2.03 | 26.50/6022 | 29.9 | 1.06 |
| 525H | 15.875 | 10.16 | 7.95 | 5.08 | 20.90 | 22.3 | 15.09 | 2.42 | 26.50/6022 | 29.9 | 1.20 |
| 530 | 15.875 | 10.16 | 9.40 | 5.08 | 20.70 | 22.2 | 15.09 | 2.03 | 26.50/6022 | 29.7 | 1.06 |
| 630 | 19.050 | 11.91 | 12.57 | 9.54 | 25.90 | 22.7 | 18.00 | 2.42 | 31.80/7227 | 41.5 | 1.50 |

*套筒链: 表中滚子直径d1为套筒直径

*Bushing chains: d1 in the table indicate the external diameter of the bushing.

O型密封圈摩托车链 O-Ring motorcycle chains

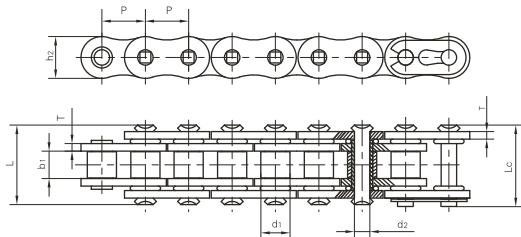

| Vision Chain No. | 节距 | 滚子直径 | 内节内宽 | 销轴直径 | 销轴长度 | | 内链板高度 | 链板厚度 | 极限拉伸载荷 | 平均拉伸载荷 | 每米重量 |
|------------------|--------|-----------------|----------------------------|--------------|------------|--------|-------------------|-----------------|---------------------------|--------------------------|------------------|
| | Pitch | Roller diameter | Width between inner plates | Pin diameter | Pin length | | Inner plate depth | Plate thickness | Ultimate tensile strength | Average tensile strength | Weight per meter |
| | p | d1 max | b1 min | d2 max | L max | Lc max | h2 max | T max | Q min | Q0 | q |
| | mm | mm | mm | mm | mm | mm | mm | mm | kN/LB | kN | kg/m |
| 420OR | 12.700 | 7.77 | 6.25 | 3.96 | 16.65 | 17.95 | 12.00 | 1.50 | 16.0/3599 | 17.00 | 0.62 |
| 428HVS | 12.700 | 8.51 | 7.94 | 4.45 | 21.30 | 22.40 | 12.30 | 2.03 | 22.0/4946 | 23.00 | 0.85 |
| 50LD | 15.875 | 10.16 | 9.53 | 5.08 | 23.40 | 24.60 | 15.09 | 2.03 | 22.2/5045 | 26.50 | 1.12 |
| 520OR | 15.875 | 10.16 | 6.70 | 5.30 | 21.20 | 22.30 | 15.09 | 2.20 | 32.0/7200 | 34.00 | 1.11 |
| 520V6 | 15.875 | 10.16 | 6.25 | 5.08 | 19.60 | 21.30 | 15.09 | 2.03 | 22.2/5045 | 26.50 | 0.96 |
| 520HOR | 15.875 | 10.16 | 6.25 | 5.24 | 21.52 | 22.92 | 15.09 | 2.42 | 26.5/6022 | 29.60 | 1.26 |
| 530HOR | 15.875 | 10.16 | 9.53 | 5.24 | 24.80 | 26.20 | 15.09 | 2.42 | 29.0/6524 | 30.00 | 1.39 |