

Best solution
Better integration

BIPV BALCONY

PV Balconies

MATERIALS

- 10 mm tempered glass
high-transparency
- 0.76 mm PVB layer
- 0.21 mm monocrystalline
PV cells 156x156 mm
- 0.76 mm PVB layer
- 10 mm tempered glass

Composition:



Size: 1000 x 1260 x 22 mm
Weight: 66.5 kg

28 CELLS BALCONY

Matrix: 4 x 7
Transparency: 45.4 %
Power: M156-28-148W
P156-28-131W

30 CELLS BALCONY


Matrix: 6 x 5
Transparency: 41.5 %
Power: M156-30-158W
P156-30-142W

42 CELLS BALCONY


Matrix: 6 x 7
Transparency: 18.1 %
Power: M156-42-222W
P156-42-198W

750 CELLS BALCONY

Matrix: 6 x 125
Transparency: 53.3 %
Power: M156-750-103W
P156-750-90W

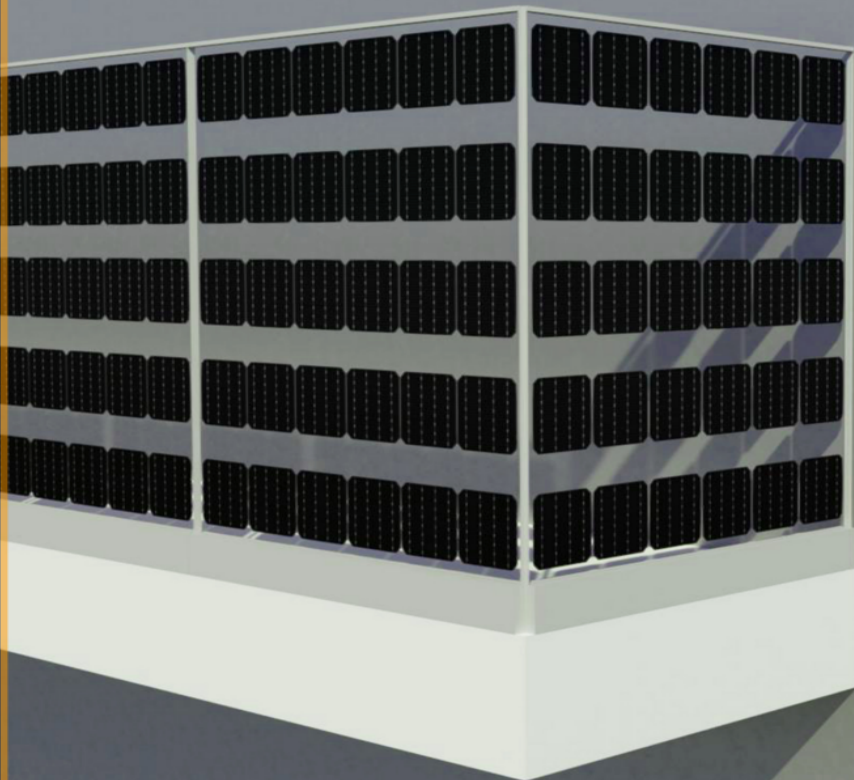

Solar balconies are a perfect solution as they constitute a range of active technological glass capable to generate electrical energy, which can be used in **new construction** and **renovation buildings**, allowing electrical autonomy and energy savings.

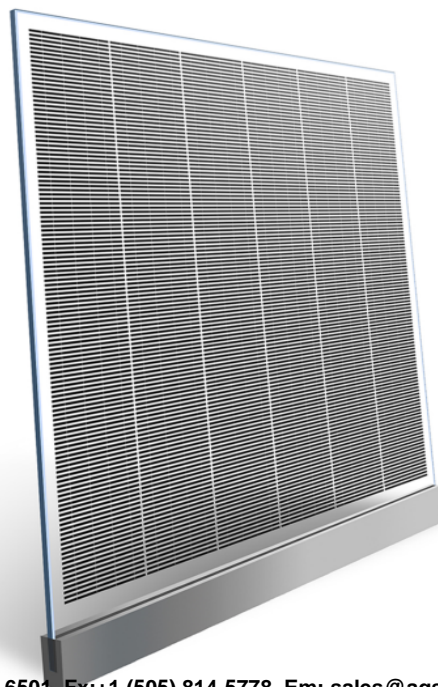


AGS-TECH, Inc., Ph: +1 (505) 550-6501, Fx:+1 (505) 814-5778, Em: sales@agstech.net,




Web: <http://www.agstech.net>

BIPV

The architectural **integration** of photovoltaic balconies in construction makes it possible to create glazed surfaces that, in addition to being an **esthetic and functional** novelty, generate electrical energy.



- sc/mc-Si FV
- 5bb connection
- high efficiency

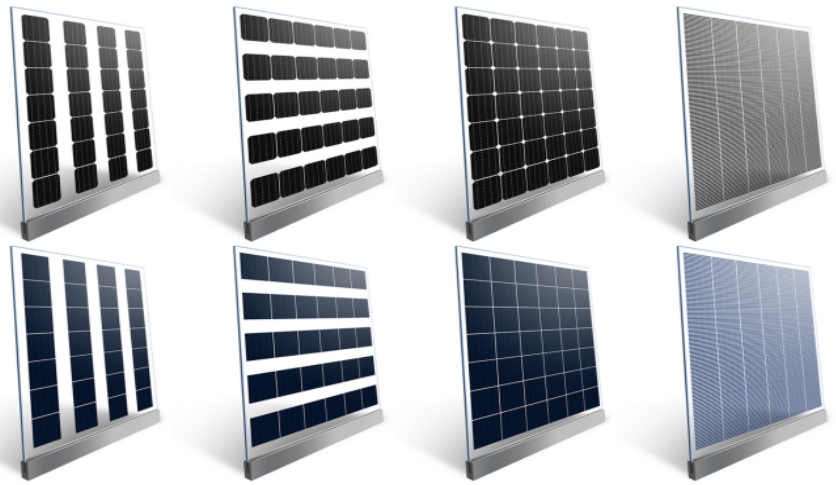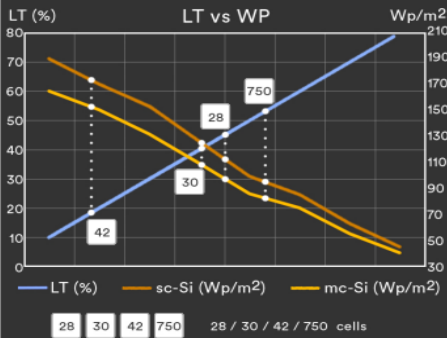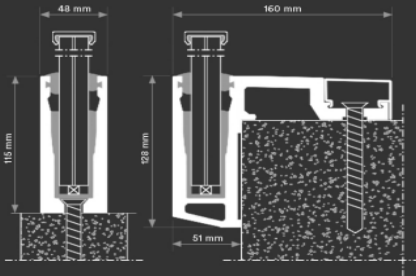

8 models

| Model | BIPV-BL-M156-28 | BIPV-BL-P156-28 | BIPV-BL-M156-30 | BIPV-BL-P156-30 | BIPV-BL-M156-42 | BIPV-BL-P156-42 | BIPV-BL-M156-750 | BIPV-BL-P156-750 |
|--------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|------------------|------------------|
| Cell type | Monocrystalline | Polycrystalline | Monocrystalline | Polycrystalline | Monocrystalline | Polycrystalline | Monocrystalline | Polycrystalline |
| Cells number | 28 uds | 28 uds | 30 uds | 30 uds | 42 uds | 42 uds | 750 uds | 750 uds |
| Cell size | 156.75 x 156.75 mm | 156.75 x 156.75 mm | 156.75 x 156.75 mm | 156.75 x 156.75 mm | 156.75 x 156.75 mm | 156.75 x 156.75 mm | 156.75 x 5 mm | 156.75 x 5 mm |
| Size | 1000 x 1260 mm | 1000 x 1260 mm | 1000 x 1260 mm | 1000 x 1260 mm | 1000 x 1260 mm | 1000 x 1260 mm | 1000 x 1260 mm | 1000 x 1260 mm |
| Thickness | 22 mm | 22 mm | 22 mm | 22 mm | 22 mm | 22 mm | 22 mm | 22 mm |
| Power | 148 Wp | 131 Wp | 156 Wp | 140 Wp | 222 Wp | 196 Wp | 103 Wp | 90 Wp |
| Transparency | 45.40 % | 45.40 % | 41.50 % | 41.50 % | 18.10 % | 18.10 % | 53.35 % | 53.35 % |

+ Energy + Saving - Outlay - CO2



2014/35/EU
EN 50583-1



ISO 9001
ISO 14001
ISO 45001



IEC/EN 61215
IEC/EN 61730
IEC/EN 63092



nZEB Nearly
Zero Energy
Buildings



Fast Return Of
Investment
material



High
satisfaction



ISO 1064
GHG Protocol



12/25 years
guarantee



High
resistance



WEEE
2002/96/CE



Photovoltaic
Architecture



Low
deterioration



AGS-TECH, Inc., Ph: +1 (505) 550-6501, Fx:+1 (505) 814-5778, Em: sales@agstech.net,

Web: <http://www.agstech.net>