
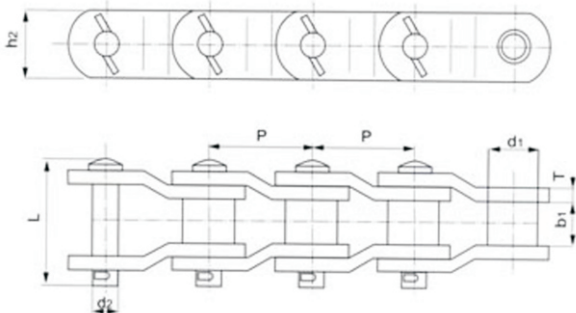


重载弯板滚子链
Overloaded curved plates roller chain




Vision Chain No.	节距 Pitch	内节内宽 Width between inner plates	滚子直径 Roller diameter	链板高度 Inner plate depth	链板厚度 Plate thickness	销轴长度 Pin length	销轴直径 Pin diameter	抗拉强度 Tensile Strangth	每米长重 Weight per meter
	P	b1 min	d1 max	h2 max	t/T max	L	d2 max	q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
2010	63.50	38.10	31.75	47.80	7.90	90.70	15.90	262	14.0
2510	78.10	31.75	36.90	40.00	8.00	94.80	16.00	271	10.7
2512	77.90	39.60	41.28	57.00	9.70	103.40	19.08	378	18.0
2814	88.90	38.10	44.40	60.50	12.70	117.60	22.25	516	25.0
3315	103.45	49.30	45.24	63.50	14.20	134.60	23.85	596	27.0
3618	114.30	52.30	57.15	79.20	14.20	141.20	27.97	814	38.0
4020	127.00	69.90	63.50	91.90	15.70	168.10	31.78	1054	52.0
4824	152.40	76.20	76.20	104.6	19.00	187.50	38.13	1521	68.0
WG/WB系列参数 WG/WB Serial Data									
Wg781	78.18	38.1	33.0	45	10.0	97	17	313.6	16
Wg103	103.2	49.2	46.0	60	13.0	125.5	23	539	26
Wg140	140	80.0	65.0	90	20.0	187	35	1176	59.2
Wb9525	95.25	39.0	45.0	65	16.0	124	23	635	22.2
Wb7900	79	39.0	31.5	54	9.5	93.5	18.5	381	12.8
Wb7938	79.38	41.2	40.0	57.2	9.5	100	19.5	509	18.7
Wb238	88.9	36.8	44.4	57.2	12.7	113.4	22.15	501.4	25.4
Wb1207	127	68.3	63.5	88.9	15.7	158.3	31.75	1044	53.1

米制长节距输送链 Metric pitch conveyor chain length


"S"型滚子
Small Roller




"P"型滚子
Plain Roller



"F"型滚子
Flanged Roller




Vision Chain No.	节距	内节内宽		销轴直径	销轴长度	S型滚子直径	P型滚子直径	F型滚子		链板高度	抗拉强度
	Pitch	Width between inner plates		Pin diameter	Pin length	Diameter of Small Roller	Diameter of P Small Roller	边缘直径	边缘直径	Inner plate depth	Tensile Strength
	P	b1 min	d2 max	L max	d1 max	d1 max	d1 max	d1 max	d1 max	h2 max	q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN
M20	40 50 83 80 100 125 160	15	6	30	12.5	25	35	35	19	20	
M28	50 63 80 100 125 160 200	17	7	35	15	30	40	40	21	28	
M40	63 80 100 125 160 200 250	19	8.5	40	18	36	45	45	26	40	
M56	63 80 100 125 160 200 250	23	10	45	21	42	55	55	31	56	
M80	80 100 125 160 200 250 315	27	12	53	25	50	65	65	36	80	
M112	80 100 125 160 200 250 315	31	15	62	30	60	75	75	41	112	
M160	100 125 160 200 250 315 400	36	18	73	36	70	90	90	51	160	
M224	125 160 200 250 315 400 500	42	21	85	42	85	105	105	62	224	
M315	160 200 250 315 400 500 630	47	25	98	50	100	125	125	72	315	
M450	200 250 315 400 500 630 800	55	30	112	60	120	150	150	82	450	
M630	250 315 400 500 630 800 1000	65	36	135	70	140	175	175	103	630	
M900	250 315 400 500 630 800 1000	76	44	154	85	170	210	210	123	900	
FM10100	100	30	14.29	64.4		50			38	112.7	
FM10500	150	22	11.1	51	22.2	40			32	68.6	
FM5100	100	22.2				40	50	50	32	68.6	
FM5150	150	22.2	11.1	51		40	50	50	32	68.66	
FM3100	100	16.1	7.94	34		31.8			22	29.4	
FM3075	75	16.1	7.94	34		31.8			22	29.4	

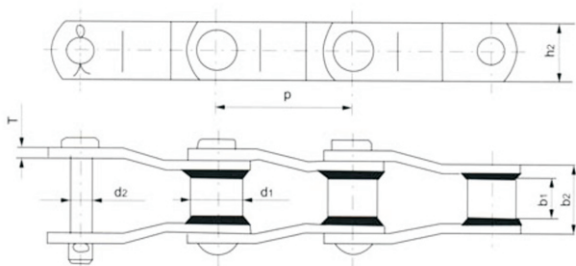窄系列焊接弯板链
Narrow series welded chain bending


Vision Chain No.	节距	套筒外径	销轴直径	链板高度	小端内宽	小端外宽	链板厚度	抗拉强度	每米长重
	Pitch	Diameter Of Bushing	Pin diameter	Inner plate depth	Inner Width Of Close End	Outer Width Of Close End	Plate thickness	Tensile Strength	Weight per meter
	P	d _{max}	d _{max}	h _{max}	b _{max}	b _{max}	t/T _{max}	q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
Wh78	66.27	22.23	12.7	28.4	28.4	51	6.4	150	5.9
DWR78	66.27	21.2	14.28	32	28.4	51	6.4	130	6.4
DWH78	66.27	21.2	14.28	32	28.4	51	6.4	170	6.4
WR78B	66.27	22.2	12.7	28.4	28.6	51	6.4	93.4	5.9
WR78H	66.95	25.4	14.27	32	25.4	51	9.5	127	12.7
WH78H	66.95	25.4	14.24	32	25.4	51	9.5	158	12.7
WH78C	66.27	22.5	12.7	28.4	28.6	52.3	7	180	7.1
WR78SS	66.27	21.2	12.7	28.4	28	52.3	7	85	7.1
Wr82	78.10	27	14.29	32	44	57	6.4	93.4	5.8
WH82R	78.10	25.4	14.29	32	44	57	6.4	150	5.75
WH82X	78.10	31.78	19.05	38.1	50.15	60.3	9.5	169	15.6

窄系列焊接弯板链

Narrow series welded chain bending

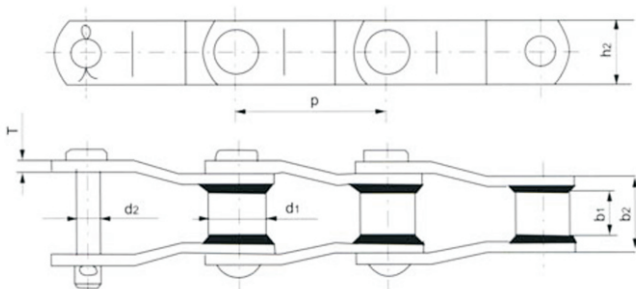


Vision Chain No.	节距	套筒外径	销轴直径	链板高度	小端内宽	小端内宽	链板厚度	抗拉强度	每米长重
	Pitch	Diameter Of Busing	Pin diameter	Inner plate depth	Inner Width Of Close End	Outer Width Of Close End	Plate thickness	Tensile Strangth	Weight per meter
	P	d _{max}	d _{max}	h _{max}	b _{max}	b _{max}	t/T	q _{min}	q
	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
WHX124	101.6	36.5	19.05	38.41	41.3	70	9.5	224.6	12.6
WHX124(H)	101.6	36.5	19.05	38.1	41.3	70	9.5	224.6	12.6
WHX132	153.67	44.45	25.25	50.8	77.1	117.76	12.7	378	20.5
WHX132(H)	153.67	44.45	25.25	50.8	77.1	117.76	12.7	378	20.5
WHX150	153.67	44.45	25.25	63.5	77.1	117.76	12.7	398	24.5
WHX150(H)	153.67	44.45	25.25	63.5	77.1	117.76	12.7	398	24.5
WHX155	153.67	44.45	28.42	63.5	73.6	117.25	14.27	411	27.7
WHX155(H)	153.67	44.45	28.42	63.5	73.6	117.25	14.27	411	27.7
WHX157	153.67	44.45	28.52	63.5	76.4	117.35	15.88	552	29.1
WHX157(H)	153.67	44.45	28.52	63.5	76.4	117.35	15.88	552	29.1
WHX124P	103.2	44.45	25.25	50.8	38.1	76.2	12.7	378	27.9
WR124R	101.6	36.5	19.05	38.1	41.3	70	9.5	169	12.6
WHX111	120.9	36.5	19.05	38.1	57.15	84.8	9.5	224.6	11.9

注：链号尾部(H)的为销轴端部而呈“O”型


Note: chain number tail (H) for pin shaft ends the angled "o" type

窄系列焊接链及配件

The narrow series welding chain and accessories

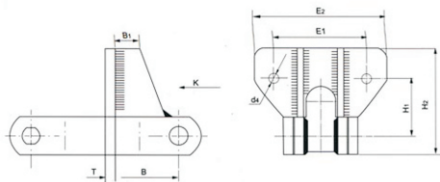


Vision Chain No.	H ₁ mm	H ₂ mm	E ₁ mm	E ₂ mm	d ₄ mm	B mm	B ₂ mm	T mm
WH78	55	110	98	135	10	66	32	10

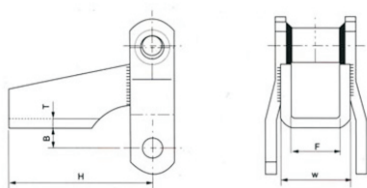


Vision Chain No.	B mm	F mm	H mm	T mm	W mm
WH78	12.7	31.7	92.2	6.4	44.5
WH82	16	38	92.2	6.4	50.8

窄系列焊接链及附件


The narrow series welding chain and accessories




Vision Chain No.	B mm	F mm	H ₁ mm	H ₂ mm	T mm
WH78	55.4	41.4	31.85	47.75	6.4
WHX124	69.1	54.9	28.7	47.75	9.5

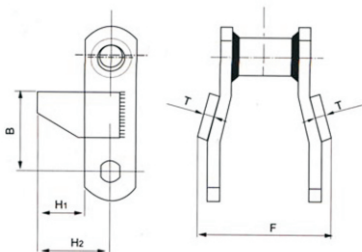


Vision Chain No.	B mm	F mm	H ₁ mm	H ₂ mm	T mm
WH78	55.4	82.8	31.85	47.75	6.4
WHX124	69.1	109.8	28.7	47.75	9.5

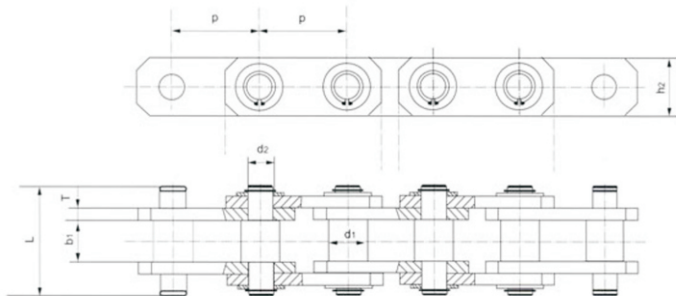钢材冷拔机连
Steel drawing machine chains


吨位 Tonnage	节距 Pitch	板厚 Thickness of Sidebar	板宽 Width of Sidebar	链板组合 Combination of Sidebars	滚子直径 Roller diameter		内宽 Inner Width	销轴长度 Pin length
	P	T	H	n x n	d1 max	d2 max	B: min	L max
	mm	mm	mm	mm	mm	mm	mm	mm
10T	103.2	16	50	2×2	36	44	50	137
10T	100	20	57	2×2	40	48	50	132
15T	100	18	69.8	2×2	40	48	50	122
10T	120	14	110	2×2	40	48	50	122
20T	120	25	57.15	2×2	50	68	56	176

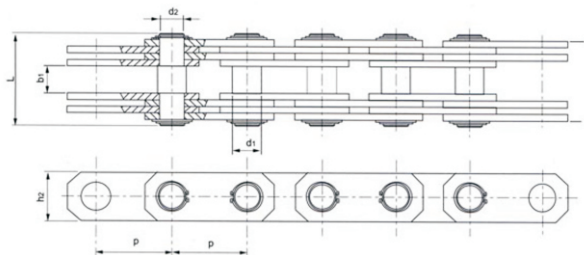钢材冷拔机连
Steel drawing machine chains


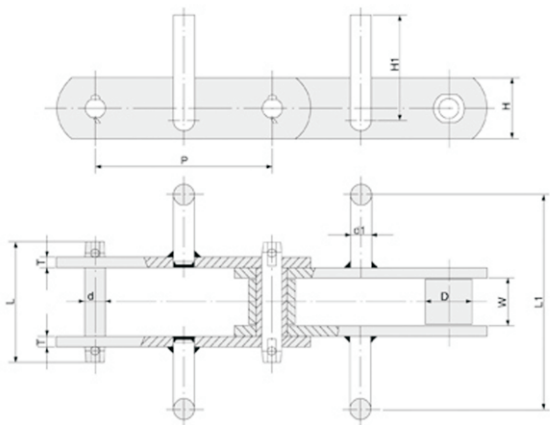
Vision Chain No.	节距	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length	链板高度 Inner plate depth	链板厚度 Plate thickness	链板组合 Combination of Sidebars	许用工作张力 Allowed Work tension
	P		b1 min	d2 max	d1 max	L max	h2 max		
	mm	mm	mm	mm	mm	mm	mm	mm	KN
HGLB80	80	50	35	40	166	80	12	4×4	10
HGLB100	100	60	35	40	178	80	12	4×4	10
HGLB100	120	53	40	48	170	100	12	4×4	20
HGLB120	120	53	35	40	170	80	12	4×4	10
HGLB120	120	60	40	50	160	100	10	4×4	10
HGLB140	140	65	55	63	192	120	12	4×4	20
HGLB140	140	70	55	65	226	120	16	4×4	30
HGLB180	180	66	60	70	223	120	16	4×4	30
HGLB180	180	75	60	70	275	120	20	4×4	40
HGLB190	190	80	60	70	280	130	20	4×4	50
HGLB200	200	90	60	69	288	130	20	4×4	50
HGLB200	200	85	65	74	240	130	16	4×4	40
HGLB250	250	100	75	84	272	120	20	4×4	45
HGLB250	250	108	70	80	307	150	22	4×4	70
HGLB250	250	100	75	88	332	150	22	4×4	80
HGLB280	280	115	100	118	351	200	25	4×4	100

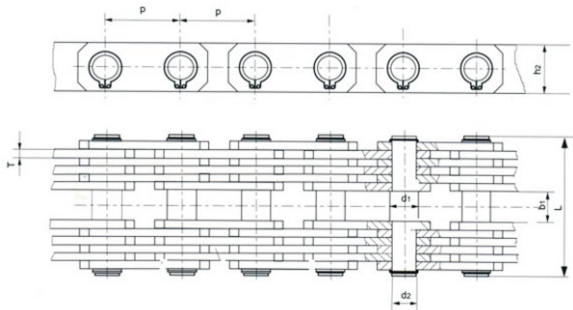钢材冷拔机连
Steel drawing machine chains


Vision Chain No.	节距	内节内宽		销轴直径		销轴长度	链板高度	链板厚度	链板组合	抗拉强度
	Pitch	Width between inner plates		Pin diameter		Pin length	Inner plate depth	Plate thickness	Combination of Sidebars	Tensile Strength
	P	b1 min	d2 max	d1 max	L max	h2 max	t/T max	n x n	q min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	ntm
KGLB180	180	80	70	80	314	120	16	6×6	50T	
HGLB190	190	92	70	80	326	120	16	6×6	50T	
HGLB250	250	110	85	95	362	190	18	6×6	120	
HGLB250	250	108	90	80	382	150	20	6×6	100	
HGLB350	300	120	100	118	405	200	20	6×6	150T	
HGLB350	300	145	100	108	425	200	20	6×6	150T	

Fu机型输送链

FU type conveyor chains




Vision Chain No.	节距	滚子直径	销轴直径	销轴长度	内节内宽	链板	链钩高	链钩直径	链宽
	P	d1 max	d2 max	L max	b1 min	HxT	H1	d1	L1
	mm	mm	mm	mm	mm	mm	mm	mm	mm
FU150	101.6	26.5	11.5	70	27	35×6	48	12	123
FU200	152.4	36	15.5	90	36.5	50×8	65	16	159
FU270	152.4	36	15.5	90	36.5	50×8	85	16	226
FU350	200	44.5	19.1	120	51.8	60×10	123	20	290
FU410	200	44.5	19.1	120	51.8	60×10	148	20	350
FU500	300	63.5	31.75	146	67.4	90×12	180	22	442
FU600	300	48.5	22.2	126	57.6	75×10	215	25	540
FU350(强力)	200	48.5	22.2	126	57.6	75×10	123	20	290
Fu410(强力)	200	48.5	22.2	126	57.6	75×10	148	20	350


弯附板式提升机链(水泥链)

Chain hoist attached to plate bending(cement chain)

埋刮板链适用于粉末状、颗粒状及小块状的水泥、粉尘、谷物、砂石和煤炭等散装物料的运输设备。
The Buried Scraper Chain is suitable for conveyor device used in bulk materials such as cement ,powder, grain powder,sand and coa in powder, pellet or small styles.

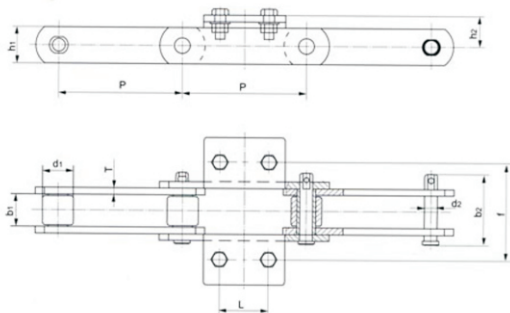

链号 Chain No.	节距 Pitch	内节内宽 Inner Width of Inner Link	滚子直径 Diameter of Roller	链板高度 Height of Sidebar	链板厚度 Thickness of Sidebar	销轴长度 length of Pin	销轴直径 Diameter of Pin	附件尺寸 Dimensions Attachent			抗拉强度 Tensile Strength
	P	B _i (min)	d ₁ (max)	h ₁	T	b ₁	d ₂	L	f	h ₂	Q (min)
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN
DT-10	100.0	20.5	44	26	4	42	9.54	40	69	25	82.0
DT-15A	101.6	15.7	38.1	26	4	37.1	9.54	40	6.35	22.3	82.0
DT-15B	101.6	31	44.45	38	7.9	75.5	15.88	40	110	35	140.0
DT-50	160.0	33.7	38.0	50	8	82.5	15.88	60	130	50	240
DT-35	160.0	36	37.5	40	6	73.0	15.88	60	130	35	180.0
DT-30D	152.4	37	38.1	45	8	86.6	16.0	60	120	37.5	224.0
DT-30A	152.4	40	38.1	45	8	89.6	16.0	60	120	37.5	224.0
DT-200.0		57.6	48.5	75	10	126	22.2	80	160	40	400.0
DT-200	250.0	67.4	63.5	90	12	146	31.25	120	200	75	580.0

斗式提升机链(水泥链)
Bucket Elevator Chain (cement chain)


斗式提升机链主要用于矿山、冶金、水泥、筑路行业的斗式提升机设备。

The bucket chain is mainly used in bucket lifter used in mine, metallurgy, cement and road making industries.


链号 Chain No.	节距 Pitch	滚子直径 Diameter of Roller	销轴直径 Diameter of Pin	销轴长度 length of Pin	内节内宽 Inner Width of Inner Link	链板厚度 Thickness of Sidebar	链板高度 Height of Sidebar	附板高度 Height of Attached Sidebar	抗拉强度 Tensile Strength
	P mm	D ₁ (max) mm	D ₂ mm	B ₁ mm	B ₁ (min) mm	T mm	h ₂ mm	H ₂ mm	Q (min) KN
NE15-101.6	101.60	26.5	11.50	70	27.0	6	35	35.0	128.1
NE30-152.4	152.40	35.0	15.50	90	36.5	8	50	50.0	245.0
NE50-152.4	152.40	35.0	15.50	90	36.5	8	50	110.0	245.0
NE100-200	200.00	42.0	19.10	120	51.8	10	60	125.0	375.0
NE150-200	200.00	48.5	22.23	120	57.8	10	60	125.0	375.0
NE300-250	250.00	70	35	165	75	16	100	150.0	450.0
NE300-250	250.00	63.5	31.75	146	67.4	12	90	150.0	450.0
NP152.4	152.40	357	15.88	88	38	7.9	45	105	245.0
Fe13600	152.40	35	15.88	86	36.5	7.9	45	120	245.0

附件尺寸 Dimensions of Attachment

链号Chain No.	D ₄	L ₁	L ₂
NE15-101.6	10	50	50
NE30-152.4	15	75	70
NE50-152.4	15	75	70
NE100-200	15	75	70
NE150-200	18	100	80
NE300-250A	18	140	100
NE300-250A	20	140	100
NP152.4	15	75	70
Fe12600	15	75	70

NSE提升机链


NSE hoisting chains

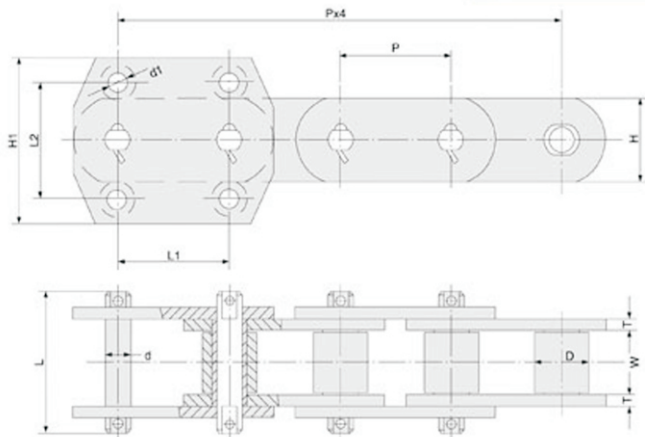

Vision Chain No.	节距	滚子直径	销轴直径	销轴长度	内节内宽	链板	龟板宽	安装孔	孔径
	P	D	d	L	W	H×T	H1	L1×L2	d1
	mm	mm	mm	mm	mm	mm	mm	mm	mm
NSE050	76.2	36	15.5	90	36.5	50×8	125	75×80	14
NSE100 200	100	44.5	19.1	120	51.8	60×10	150	100×105	18
NSE300	100	48.5	22.2	126	57.6	75×10	150	100×105	18
NSE400 500	125	63.5	31.75	146	67.4	80×12	180	125×130	18
NSE600	125	70	35	170	75	100×16	180	125×130	18
NSE700 800	150	85	48	185	80	125×16	228	150×165	22

模锻刮板链


Forging Scraper chains

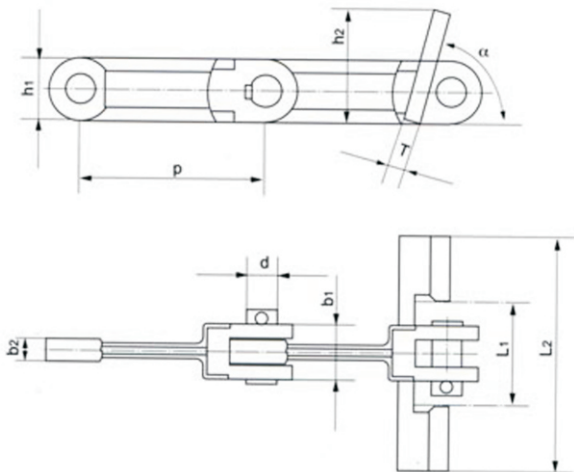


链号 Chain No.	节距 Pitch P mm	链板高度 Height of Sidebar H ₂ max	链板厚度 Thickness of Sidebar		销轴直径 Diameter of Pin D ₂ mm	刮板尺寸 Dimensions of Scraper					抗拉强度 Tensile Strength Q (min) KN
			B ₁ mm	B ₂ mm		L ₁ mm	L ₂ mm	H ₂ mm	α mm	T mm	
YD640A	142	48	42	18	23	-	300	48	75°	14	230.0
YD640C	142	50	54	22	25	80	590	50	90°	14	262.4
YD640D	142	50	54	22	25	90	590	82	90°	14	262.4
YD200	150	40	38	16	18	-	177	40	75°	8	162.0
YD310	200	46	44	20	20	-	280	46	75°	12	162.0

冶金行业驮载链

Metallurgical industry pack containing chain

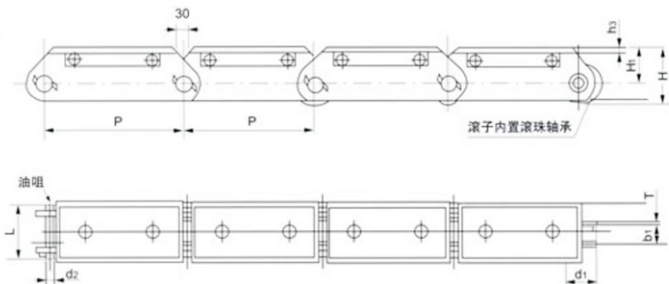


链号 Chain No.	节距 Pitch P mm	滚子直径 Diameter of Roller D _i (max) mm	内节内宽 Inner Width of Inner B _i (min) mm	链板参数 Data of Sidebar				销轴参数 Data of Pin		抗拉强度 Tensile Strength Q (min) KN
				T mm	H mm	H1 mm	H2 mm	D2 mm	L mm	
WH60300	300	125	65	12.7	171	42.5	20	36	165	600
WH90400	400	135	79	12.7	182.5	54	13.5	36	179	900
WH130400	400	150	74	16	195	61	14	46	197	1300
WH160500	500	175	91	16	227	69	18.5	46	205	1600
3754378	450	135	70	12.7	171.5	48.5	19	38	157.5	882
WH315	315	120	80	10	180	68	15	36	180	880
WH250	250	100	55	8	150	55	10	28	146	520

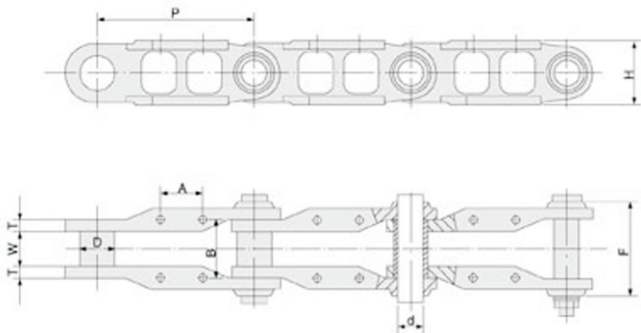SCD槽式输送链
Tank conveyor chain


Vision Chain No.	节距 Pitch	滚子直径 Diameter of Bush	销轴直径 Diameter of Pin	销轴长度 Length of Pin	内节内宽 Inner Width of Inner	链板高度 Height of Sidebar	链板厚度 Thickness of Sidebar	外宽 Outer width	安装尺寸 Installation Dimension
	P mm	D mm	d mm	L mm	W mm	H mm	T mm	F mm	A×B mm
SCD630	250	60	44	167	60	110	20	160	80×100
SCD630A	250	66	44	170	60	110	20	160	80×100

粮机输送链


Grain machine conveyor

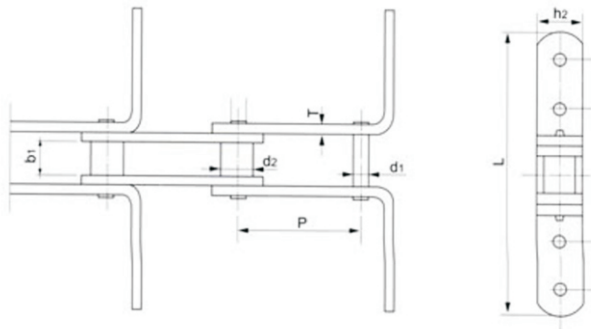

Vision Chain No.	节距	内节内宽	滚子直径	销轴直径	链板高度	链板厚度	刮板宽度	刮板高度	抗拉强度 Tensile Strength Q (min) KN
	P	B _i (min)	D ₁ (max)	D ₂ (max)	H ₂ max	T	L	H ₂	
	mm	mm	mm	mm	mm	mm	mm	mm	
LTE665	66.5	26.5	22	12	30	6	164	30	130
LTE665	66.5	26.5	22	12	30	6	180	30	130
LTE665	66.5	26.5	22	12	30	6	225~265	30	130
LTE100	100	38.5	36	16	40	6	225~305	40	220
LTE100	100	29.6	22.3	11.1	29	5	185	29	90
LS125	125	32.5	28.6	14.3	42	6	235	42	170
LS125A	125	32	25	17	56	6	220	56	220
LS125B	125	32	36	20	60	6	290	60	300
LS160	160	52	40	20	55	9.5	470	55	378
LS160A	160	52	40	20	55	9.5	580	55	378
LS160B	160	45	39.3	22	60	8	360	60	470
LE160C	160	36.8	36	18	48	8	160	48	240
LS160D	160	45	39.3	22	60	6	370	60	352

粮机输送链

Grain machine conveyor

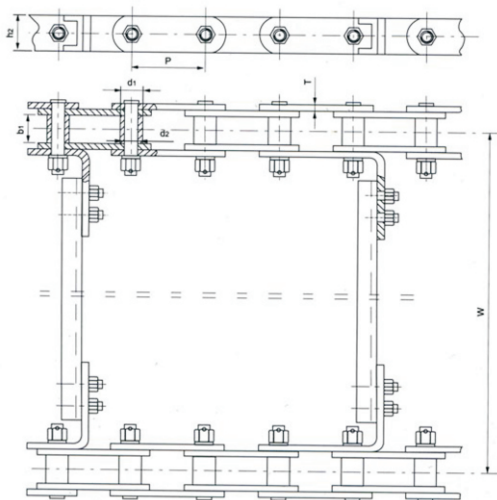

Vision Chain No.	节距	滚子直径	内节内宽	销轴直径	销轴长度	链板高度	链板厚度	节距	单链抗拉强度
	P	D ₁ (max)	B ₁ (min)	D ₂ (max)	L (max)	H ₂	T	W	Q (min)
	mm	mm	mm	mm	mm	max	mm	mm	KN
LTE665	66.5	22	26.5	12	54	30	6	127.0	130
LTE665	100	36	38.5	16	82	40	8	150	200
LTE100	110	38	23.9	15.85	77	35	6	188	170
LTE125	125	40	52	28.1	101.2	65	8	260	220