




HOOK 吊钩




Eye Hooks With Latch S-320 美式眼型货钩 S-320

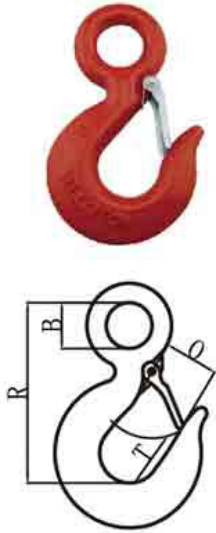

Forged, Quenched & Tempered
 Proof Load is 2 times Working Load Limit
 Ultimate Load is 5 times Working Load Limit
 320C-Carbon Steel;320A-Alloy Steel

WLL(t)		Diemensions (in)				Weight(lbs)
320C	320A	B	R	O	T	
1/2	3/4	0.63	2.8	0.81	0.65	0.37
3/4	1	0.75	3.22	0.88	0.81	0.57
1	1 1/2	0.91	3.66	0.97	0.81	0.77
1 1/2	2	1.12	4.09	1	0.84	1.28
2	3	1.25	4.69	1.12	1.19	1.73
3	4 1/2	1.56	5.78	1.34	1.38	3.66
5	7	2	7.38	1.69	1.78	7.19
7 1/2	11	2.44	9.06	2.06	2.12	13.17
10	15	2.83	10.09	2.22	2.72	22.15

Swivel Hooks S-322 美式旋转钩 S-322

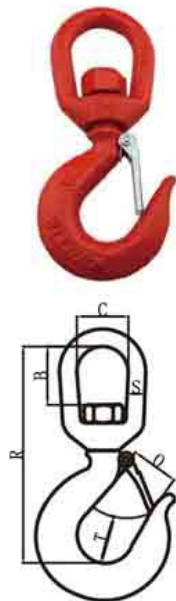


Forged, Quenched & Tempered
 Proof Load is 2 times Working Load Limit
 Ultimate Load is 5 times Working Load Limit
 322C-Carbon Steel;
 322A-Hook : Alloy Steel; Bail: Carbon Steel

WLL(t)		Diemensions(in)						Weight (lbs)
322C	322A	B	C	O	R	S	T	
3/4	1	0.93	1.25	0.88	4.47	0.37	0.8	0.77
1	1 1/2	1.31	1.5	0.97	5.28	0.5	0.8	1.27
1 1/2	2	1.62	1.75	1	6	0.62	0.84	2.28
2	3	1.56	1.75	1.125	6.37	0.62	1.19	2.60
3	4 1/2	1.75	2	1.34	7.4	0.75	1.37	4.81
5	7	2.31	2.5	1.69	9.59	1	1.78	10.40
7 1/2	11	2.38	2.75	2.06	11.12	1.125	2.125	16.42
10	15	2.8	3.12	2.25	11.93	1.25	2.5	23.40

HOOK


Clevis Slip Hooks With Latches 美式带舌片羊角滑钩



Forged Carbon or Alloy Steel
Quenched & Tempered
Ultimate Load is 4 times the Working Load Limit

Size (in)	WLL(lbs)		Dimensions (in)					Weight (lbs)
	Carbon	Alloy	B	E	P	R	T	
1/4"	1950	2750	0.44	0.79	0.38	2.56	0.79	0.52
5/16"	2875	4300	0.50	0.93	0.44	2.87	0.79	0.77
3/8"	4000	5250	0.59	1.14	0.47	3.25	1.02	1.23
7/16"	5000	7000	0.66	1.18	0.56	3.70	1.06	2.10
1/2"	6500	9000	0.75	1.42	0.63	4.00	1.38	2.85
5/8"	9250	13500	0.91	1.65	0.75	4.94	1.69	5.18


Clevis Slip Hooks H-331/A-331 美式羊角滑钩 H-331/A-331



H-331 Forged Carbon Steel
A-331 Forged Alloy Steel
Quenched & Tempered
Ultimate Load is 4 times the Working Load Limit

Size (in)	WLL(lbs)		Dimensions(in)				Weight (lbs)
	H-331	A-331	B	E	P	R	
1/4"	1950	2750	0.44	0.94	0.38	2.56	0.50
5/16"	2875	4300	0.50	1.66	0.44	2.87	0.75
3/8"	4000	5250	0.59	1.31	0.47	3.25	1.20
7/16"	5000	7000	0.66	1.56	0.56	3.70	2.06
1/2"	6500	9000	0.75	1.69	0.63	4.00	2.80
5/8"	9250	13500	0.91	2.00	0.75	4.94	4.75
3/4"	12500	19250	1.31	2.50	1.00	6.09	10.30

Eye Slip Hooks With Latch 美式带舌片眼型滑钩

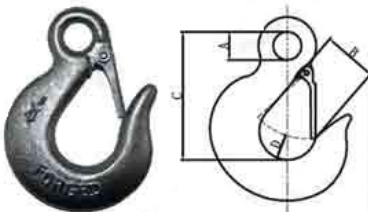

Forged Carbon or Alloy Steel
Quenched & Tempered
Ultimate Load is 4 times the Working Load Limit

Size(in)	WLL(lbs)		Dimensions(in)				Weight (lbs)
	Carbon	Alloy	A	B	C	D	
1/4	1950	2750	0.5	0.75	2.56	0.79	0.42
5/16	2875	4300	0.63	0.88	2.95	0.79	0.72
3/8	4000	5250	0.72	1.1	3.36	1.02	1.03
7/16	5000	7000	0.81	1.25	3.88	1.06	1.64
1/2	6500	9000	0.94	1.38	4.28	1.3	2.45

Eye Slip Hooks H-324/A-324 美式眼型滑钩 H-324/A-324

H-324 Forged Carbon Steel
 A-324 Forged Alloy Steel
 Quenched & Tempered
 Ultimate Load is 4 times the Working Load Limit



Size (in)	WLL(lbs)		Diemensions (in)			Weight (lbs)
	H-324	A-324	B	E	R	
1/4"	1950	2750	0.50	0.94	2.56	0.40
5/16"	2875	4300	0.63	1.06	2.95	0.70
3/8"	4000	5250	0.72	1.31	3.36	1.00
7/16"	5000	7000	0.81	1.56	3.88	1.60
1/2"	6500	9000	0.94	1.69	4.28	2.40
5/8"	9250	13500	1.13	2.00	5.22	4.00
3/4"	12500	19250	1.38	2.13	5.80	6.50

Eye Grab Hooks H-323/A-323 美式眼型抓钩 H-323/A-323


H-323 Forged Carbon Steel
 A-323 Forged Alloy Steel
 Quenched & Tempered
 Ultimate Load is 4 times the Working Load Limit



Size (in)	WLL(lbs)		Diemensions (in)			Weight (lbs)
	H-323	A-323	B	E	R	
1/4"	2600	3600	0.50	0.34	1.97	0.28
5/16"	3900	5400	0.56	0.44	2.25	0.45
3/8"	5400	7500	0.66	0.50	2.56	0.79
7/16"	7200	10000	0.75	0.56	2.94	1.19
1/2"	9200	12750	0.88	0.66	3.38	1.80
5/8"	12750	19000	1.06	0.78	4.11	3.30
3/4"	18500	27000	1.38	0.94	5.16	6.00

Clevis Grab Hooks H-330/A-330 美式羊角抓钩 H-330/A-330

H-330 Forged Carbon Steel
 A-330 Forged Alloy Steel
 Quenched & Tempered
 Ultimate Load is 4 times the Working Load Limit




Size (in)	WLL(lbs)		Diemensions(in)				Weight (lbs)
	H-330	A-330	B	E	P	R	
1/4"	2600	3600	0.36	0.40	0.38	1.97	0.40
5/16"	3900	5400	0.40	0.44	0.44	2.26	0.79
3/8"	5400	7500	0.48	0.50	0.47	2.63	1.00
7/16"	7200	10000	0.66	0.56	0.56	2.75	1.50
1/2"	9200	12750	0.75	0.66	0.63	3.19	2.10
5/8"	12750	19000	0.91	0.78	0.75	4.09	4.20
3/4"	18500	27000	0.94	0.94	0.88	4.63	6.50

HOOK


Forged Shank Hooks 锻造直杆钩

Forged, Quenched & Tempered
 Proof Load is 2 times Working Load Limit
 Ultimate Load is 5 times Working Load Limit
 319C-Carbon Steel; 319A-Alloy Steel



WLL(t)		Dimensions(in)								Weight (lbs)
Carbon	Alloy	B	E	C	M	G	F	D	L	
0.75	1	73	25	15	18	16	51	32	127	0.5
1	1.5	80.3	25.5	16.7	20	18	58	35	147	0.75
1.5	2	92	30.4	18.4	23	22.5	67	38	165	0.99
2	3	105	32	22.4	26	24	69	24	177.5	1.85
3	5	126	38.5	29.5	32	29	82	51	216.5	3.86
5	7	167	47	35.8	40	36	95.5	64	262.5	7.25
7.5	11	192	61	46	51	47.7	111.2	76	323	13.45
10	15	214.6	66	50.8	55.6	55.5	114	82.5	342	18.1
15	22	262.5	89.5	65	68.8	68.5	141	108	426	35.3


Large Opening Hooks 大开口钩

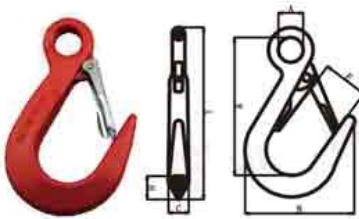

Size (lbs)	WLL(t)	B.L.(t)	Dimensions(mm)							Weight (lbs)
			A	B	C	L	R	E	H	
5000	3.2	4.4	23	97	16	162	133	37	20.6	1.1
7000	3.1	6.2	22	108	20.3	168	133.5	40	24	1.63

Clevis Sling Hooks With Latches U型吊索钩

Forged Alloy Steel
 Quenched & Tempered
 Ultimate Load is 4 times the Working Load Limit



Size(in)	WLL(lbs)	Dimensions(in)					Weight (lbs)
		C	F	R	T	D	
1/4	3500	1 1/4	1 3/4	3 23/32	1 1/8	23/64	0.97
3/8	7100	1 5/8	2 15/64	4 47/64	1 3/8	29/64	2.18
1/2	12000	1 15/16	2 1/2	5 21/32	1 9/16	19/32	4.39
5/8	18100	2 1/4	2 7/8	6 19/32	2	3/4	8.06

Eye Foundry Hooks (A-329) 眼型铸造钩 A-329


Forged Alloy Steel
 Quenched & Tempered
 Test Load is 2.5 times the Working Load Limit
 Ultimate Load is 4 times the Working Load Limit



Size(in)	WLL(lbs)	Dimensions(in)			Weight (lbs)
		L	O	W	
1/4	3500	4.75	0.63	2.5	2.4
3/8	7100	5.75	0.75	3	4.5
1/2	12000	6.88	1	3.5	7.1
5/8	18100	8.06	1.25	4	12.2
3/4	28300	9.25	1.5	4.5	19.3
7/8	34200	10.38	1.75	5	26.3

Clevis Grab Hooks, Italian Type 意式羊角抓钩


Forged Alloy Steel
 Quenched & Tempered
 Ultimate Load is 4 times the Working Load Limit



Size (mm)	Chain Size	WLL(t)	Test Load(t)	Dimensions(mm)				Weight (lbs)
				B	L	I	P	
6-8	6	1.1	2.2	8	42	6.7	8	0.17
7/8-8	7-8	2	4	10	50	9	10	0.35
10-8	10	3.15	6.3	13	72	13	12.5	0.81
13-8	13	5.3	10.6	17	88	17	16	1.38
16-8	16	8	16	20	102	21	19	2.5
20-8	19-20	12.5	25	24	117	24	24	4.5
22-8	22	15	30	26	139	25	25	5.9

Eye Grab Hooks, Italian Type 意式眼型抓钩

Forged Alloy Steel
 Quenched & Tempered
 Ultimate Load is 4 times the Working Load Limit




Size(mm)	Chain Size(mm)	WLL(t)	Test Load(t)	Dimensions(mm)			Weight (lbs)
				B	L	O	
5/6-8	5-6	1.1	2.2	9	48.5	12	0.33
7/8-8	7-8	2	4	10	60	16	0.68
10-8	10	3.15	6.3	13	80	21	1.58
13-8	13	5.3	10.6	17	104	26	3.05
16-8	16	8	16	20	114	30	5.27
20-8	18-20	12.5	25	23	132	36	9.4
22-8	22	15	30	27	157	38	13.01

HOOK

Clevis Slip Hooks With Latches, Italian Type 意式羊角滑钩


Forged Alloy Steel
Quenched & Tempered
Ultimate Load is 4 times the Working Load Limit

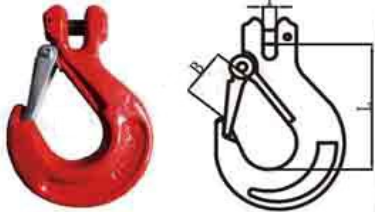

Size(mm)	Chain Size(mm)	WLL(t)	Test Load(t)	Diemensions(mm)			Weight (lbs)
				B	L	I	
6-8	5-6	1.1	2.2	22	73	6.7	0.66
7/8-8	7-8	2	4	25.5	86	8.7	1.21
10-8	10	3.15	6.3	30.8	105	10.2	2.32
13-8	13	5.3	10.6	41	128	15.3	4.19
16-8	16	8	16	50	155	19	7.83
20-8	19-20	12.5	25	60	184	21	13.04
22-8	22	15	30	71	222	36	16.1

Eye Slip Hooks, Italian Type 意式眼型滑钩

Forged Alloy Steel
Quenched & Tempered
Test Load is 2 times the Working Load Limit
Ultimate Load is 4 times the Working Load Limit

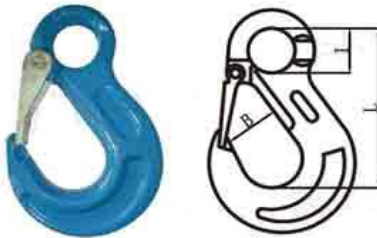

Size(mm)	WLL(t)	Diemensions(in)			Weight (lbs)
		B	I	L	
5/6	1.1	22	20.5	80.5	0.77
7/8	2	25.5	25	95.5	1.28
10	3.15	30.5	34	120.5	2.16
13	5.3	41	42.5	150	3.68
16	8	52	52	183	4.96
20	12.5	60	62	217.5	12.15
22	15	70	66	226	15
26	21.2	72	73	280	25.35
32	31.5	83	84	314	36.38


Eye Sling Hooks With Latches 眼型吊货钩

Forged Alloy Steel
Quenched & Tempered
Ultimate Load is 4 times the Working Load Limit



Size(in)	WLL(lbs)	Diemensions(in)					Weight (lbs)
		B	E	N	R	T	
1/4	3500	14.3	32	44.4	94.5	26	0.88
3/8	7100	19.1	41.5	56.8	120.3	32	1.92
1/2	12000	23.8	50	53.6	143.7	39.5	3.84
5/8	18100	28.6	53.5	67	167.5	52	8.23


Screw Sling Hooks 吊货钩

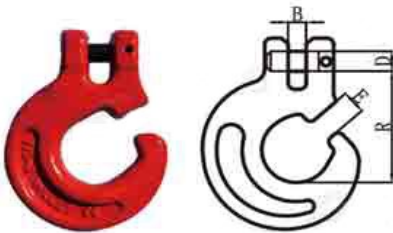

Forged Alloy Steel
Quenched & Tempered


Size(mm)	MBS(t)	Diemensions(mm)				Weight (lbs)
		B	D	E	R	
6-7	6.2	6.7	7.9	8.6	42	0.57
7-8	10	9	10.3	10.4	55.7	0.92
10	12	12.2	12.5	11.6	76	1.8

G80 Eye Self-Locking Hooks 80级眼型自锁钩

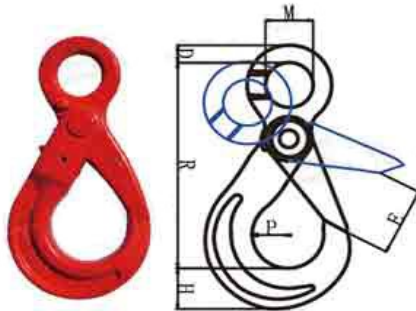

Size(m)	Weight (lbs)	WLL(t)	B.L(t)	Diemensions(in)					
				M	R	D	P	H	E
6-8	1.1	1.12	4.48	22	110.5	10	34	19.5	28
7/8-8	1.8	2	8	25	136	12	46	24	34
10-8	3.2	3.15	12.6	32	171	15	56	30	44
13-8	6.3	5.3	21.2	40.5	208.5	19.5	69	40	52
16-8	12.4	8	32	56	257.5	22	86	50.5	60
18/20-8	16.8	12.5	50	64.5	275	27	100	55	81
22-8	28.7	15	60	70	320	30	98	67	82
26-8	39.7	21.2	84.8	80	363	34	110	75	110
32-8	98.2	31.5	126	105	472	45	166	97	168

G80 Swivel Self-Locking Hooks 80级旋转自锁钩

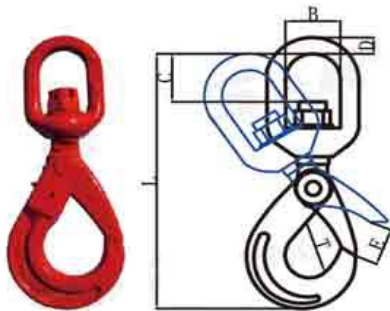

Size (mm)	Weight (lbs)	WLL(t)	B.L(t)	Diemensions(in)					
				B	C	D	L	T	E
6-8	1.6	1.12	4.48	32.5	22	11.25	170	34	29
7/8-8	2.4	2	8	35.5	26	12.5	210	46	34
10-8	4.4	3.15	12.6	42	34	15	247	56	44
13-8	8.8	5.3	21.2	50	38.5	16	302	69	52
16-8	16.1	8	32	61	55	21.5	383	86	60
18/20-8	25.6	12.5	50	72	61	26	418	100	83
22-8	35.3	15	60	95	95	33	527	98	88
26-8	47.4	21.2	84.8	122	115	42	610	110	95.5
32-8	174.3	31.5	126	140	126	52	777	166	150


HOOK

Trailer Hooks




Size(in)	Dimensions(in)			MBS(lbs)	Weight (lbs)
	L	O	W		
3/4	2.81	0.75	0.71	7500	0.42

Powerful Hooks For Chains

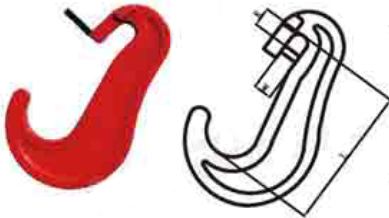


L	Dimensions(mm)		MBS(t)	Weight (lbs)
	W	K		
123	15	18	10	2.3
100	16	18	15	3
164	18	17.5	20	3.53

Small Tow Hooks

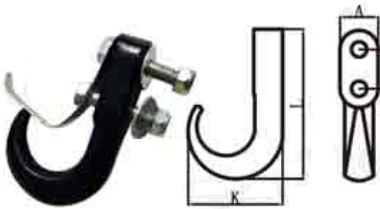

Dimensions(in)				Max Load (lbs)	Breaking Strength (lbs)	Weight (lbs)
A	B	K	L			
1.32	1.37	3.25	5.25	10000	15000	1.59

Caw Tow Hooks

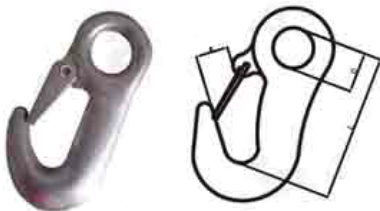

Dimensions(mm)			MBS(t)	Weight (lbs)
L	O	W		
110	18	17	2	0.29

Wire Rope Clamp Hooks



Forged Alloy Steel
 Quenched & Tempered
 Breaking Strength: Hook 50 tons
 Shackle 60 tons
 Weight/set: 6.5 kgs