

Tel: 505-550-6501 Fax: 505-814-5778 Email: sales@agstech.net Web: www.agstech.net

PRIVATE LABEL OPTION OEM OPTION



Year Warranty Jahre Garantie ans de Garantie años de garantía års garanti

We can put your company name, brand....on these

AIR

CONTROL

AIR BOY BLOW GUNS

BLOW GUNS FOR COMPRESSED AIR | MADE IN DENMARK



Find your Air Boy blow gun FIND THE BLOW GUN THAT MEETS YOUR REQUIREMENTS

Below you find the specifications for the Air Boy blow guns. Find the blow gun that meets your requirements to air consumption, noise level, blowing force, working pressure and if it complies with OSHA or EU standards.

	Air consumption at 8 bar	Noise level at 8 bar (6 bar)	Blowing force (N) distance 150 mm	Max. working pressure	OSHA 1910.95 (b) Max. 90 dB 8 hr	OSHA STD 1-13.1 Max. 30 psi blocked	2003/10/CE Max. 85 dB
Air Boy Classic Robust, infinitely adjustable and leak free	380 l/min.	85 dB (84 dB)	3.92 N	Max. 16 bar	OK	-	ОК
Air Boy SUPER Silent Low noise level, unblockable and high blowing force	330 l/min.	78.5 dB (76.8 dB)	2.94 N	Max. 12 bar	OK	ОК	ОК
Air Boy Silent Low noise level and unblockable	260 l/min.	74 dB (72 dB)	1.72 N	Max. 16 bar	OK	ОК	ОК
Air Boy TURBO The venturi nozzle increases air flow by 100 %	300 l/min.	85.4 dB (83.7 dB)	3.19 N	Max. 16 bar	OK	ОК	-
JET Air Boy High blowing force and low noise level	580 l/min.	81.5 dB (78 dB)	5.05 N	Max. 8 bar	OK	ОК	ОК
Safety Air Boy 3.5 bar Automatic pressure reduction (3.5 bar)	220 l/min.	76.5 dB (73.5 dB)	1.86 N	Max. 16 bar	OK	-	ОК
Safety Air Boy 2 bar Automatic pressure reduction (2 bar)	140 l/min.	68 dB (67 dB)	1.08 N	Max. 16 bar	OK	ОК	ОК
Air Boy THRUST Very high blowing force and unblockable	600 l/min.	98.2 dB (101.5 dB)	8.86 N	Max. 12 bar	-	OK	-

SEARCHING FOR TOOLS FOR COMPRESSED AIR?

Plant also produces professional quality tools, quick connect couplings and accessories for compressed air. Contact us to get the catalogues.

Air Boy blow guns



AIR BOY QUALITY AND AS PRIVATE LABEL

Trust you blow gun - get to know the Air Boy quality and the possibility of private label.



6

	AIR BOY CLASSIC With straight or bent pipes, long or standard lengths and pipe diameters of ø6 mm or ø8 mm.	
	SUPER SILENT AIR BOY Stainless steel pipe. Unblockable. Different varieties. Low noise level at only 78.5 dB at 8 bar.	
	SILENT AIR BOY Low noise level only 74 dB at 8 bar, unblockable or with pressure stop.	
i de	AIR BOY THRUST Very high airflow of 600 l/min. Ideal for heavy work. Blow pipe in different lengths. Unblockable.	1
	AIR BOY TURBO Venturi nozzle increases air flow by 100 %, unblockable, bent pipe.	1;





SAFETY AIR BOY Automatically reduces pressure to 2.0 or 3.5 bar if tip is blocked.



AIR BOY NON SCRATCH Protects sensitive surfaces from being scratched.

JET AIR BOY High airflow at 580 l/min. Flat nozzle spreads airflow. Unblockable.



AIR BOYINFLATING GUNS

For bicycle valves, auto valves or for balls or narrow spaces.



ACCESSORIES

Push-in nozzles, protective shields and other nozzles for blow guns.

18

4

6

2

13

14


15

16

Why choose an Air Boy blow gun?

The Air Boy design has since the 1970's proven its quality, durability and impact resistance to thousands of professionals.

All Air Boy blow guns are produced in Denmark with focus on efficiency, quality and reliability. Service life is state of the art. Therefore, we offer a 25-year warranty on the valve system in all our Air Boy blow guns.

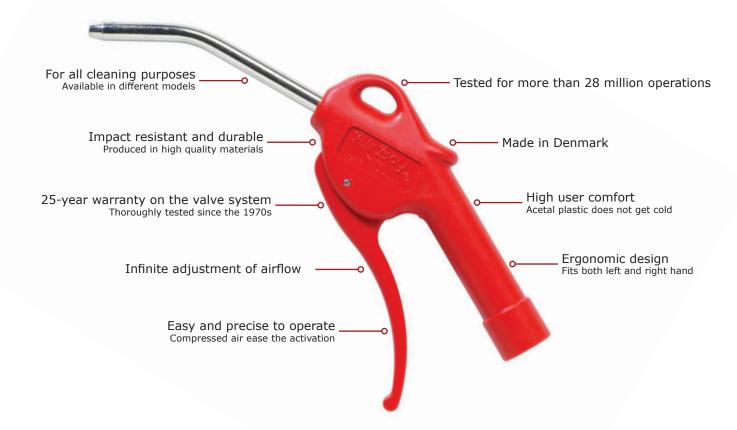



Year Warranty Jahre Garantie ans de Garantie años de garantía års garanti The durability of our blow guns is first-class. We have tested them for years and even after 28 million operations the blow guns are still completely airtight and fully functional.

Therefore, we offer you a 25-year warranty on the valve system in all Air Boy blow guns.

Get your private label blow gun YOU STILL GET THE SUPERIOR AIR BOY QUALITY

If you choose a blow gun as private label, you are guaranteed the well-known Air Boy quality. You get all the benefits from the Air Boy brand, but with your own brand and in a colour of your choise. If you prefer your own handle design, this is also possible. We still provide a 25-year warranty on the valve system in your private label blow gun.

We can supply blow guns in any color with your logo cast in the gun (1). There is also the option of laser engraving (2) on the right side of the gun body with e.g. item number, production date or safety instructions.

The entire product range of tools and couplings are available as private label. Contact us.





1) Logo cast in the blow gun 2) Laser engraving

Choose your packaging STANDARD OR AS PRIVATE LABEL

Air Boy blow guns will usually be delivered in FSC boxes of 25 units with graphic label or with flag label on the blow pipe.

As well as we offer private label solutions on our products, we also have the possibility to adjust the packaging to your requirements - even at low quantities. If you do not have the opportunity to deliver a finished design, we can help you in the process.

Please contact us for further information.








Air Boy Classic ROBUST AND IMPACT RESISTANT, INFINITE ADJUSTMENT, LEAK FREE

Air Boy Classic is the standard model of our blow guns. The model is suitable for many different purposes as blow-off, cleaning and drying tasks.

The timeless design, impact resistant materials and infinite adjustment makes the blow gun very user-friendly and long-lasting. The Air Boy blow guns are leak free and available in different varieties to fit exactly your needs. They are produced with straight as well as bent pipes and with longer pipes, which enables work in narrow places. The pipes comes in either galvanized or stainless steel where the stainless steel blow guns are ideal for fluids and aggressive environments.

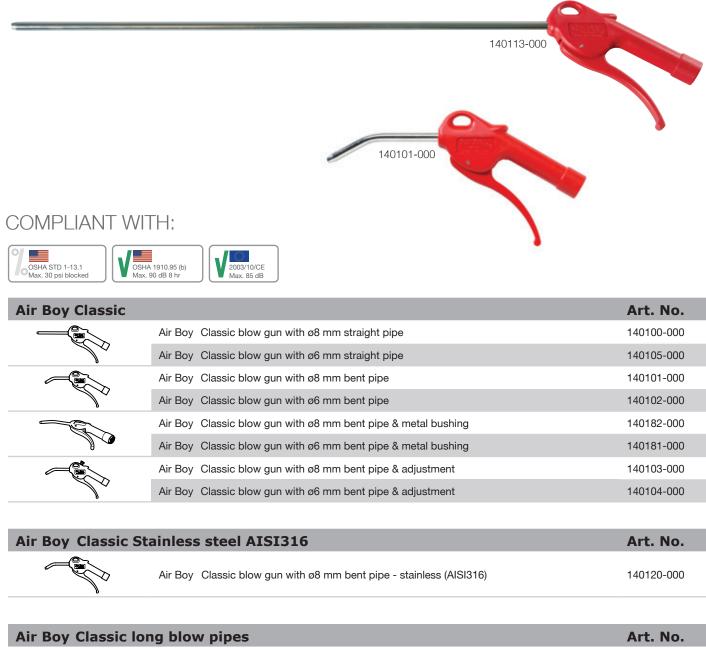

	Air Boy Classic blow gun with ø8 mm x 300 mm straight pipe	140112-000
	Air Boy Classic blow gun with ø8 mm x 500 mm straight pipe	140113-000
<i>y</i>	Air Boy Classic blow gun with ø8 mm x 1000 mm straight pipe	140114-000
A	Air Boy Classic blow gun with ø8 mm x 300 mm bent pipe	140112b-000
	Air Boy Classic blow gun with ø8 mm x 500 mm bent pipe	140113b-000
<i>b</i>	Air Boy Classic blow gun with ø8 mm x 1000 mm bent pipe	140114b-000





Air Boy Classic with bent pipe. Large variety of bent or straight pipes, with or without adjustment and different length of blow pipes. Here shown with a our safety coupling.

Mar.	
P	

Materials

Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube and shaft	Steel, electro-galvanized
Spring	Hardened spring wire

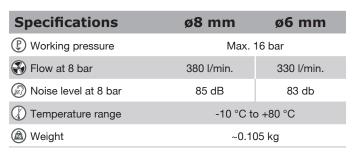

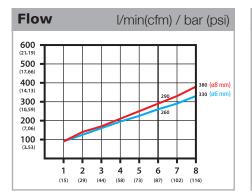




Blowi	ing force	Newton (g) / bar (psi)
(510) 4 - (408) 3 - (204) 1 - (102)		



Super Silent Air Boy LOW NOISE LEVEL, UNBLOCKABLE AND HIGH BLOWING FORCE


Super Silent Air Boy is one of our silent blow guns. A high blowing force, together with the low noise level, makes the Super Silent Air Boy a powerful and user-friendly blow gun. The blowgun is unblockable, which ensures that the air flow continues out the sides of the pipes if the tip is blocked.


The blow gun can be used for different purposes. They all have infinite adjustment, but are also available with volume control. The pipes come in two long lengths with straight pipe and in standard length with bent pipe. This makes it easier to find exactly the pipe that fits the work area.

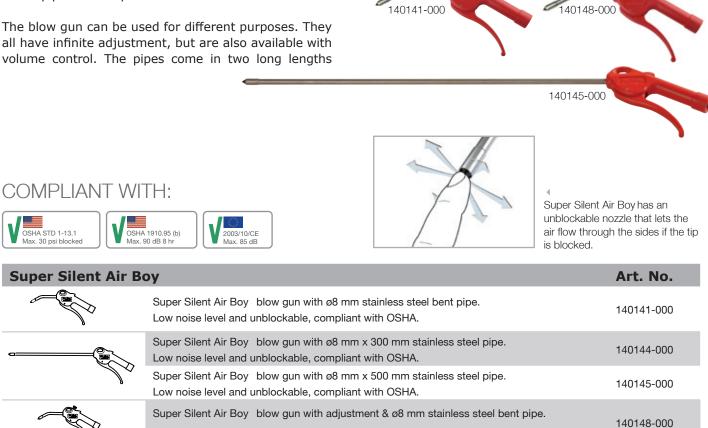

Low noise level and unblockable, compliant with OSHA.

Materials	
Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube and shaft	Stainless steel
Spring	Hardened spring wire





Specifications (P) Working pressure Flow at 8 bar

Flow at 8 bar	330 l/min.
Noise level	78.5 db (8 bar) / 76.8 db (6 bar)
() Temperature range	-10 °C til +60 °C
leight	~0.100 kg

Blowing force Newton (g) / bar (psi) 6 (612) ed on a 400 x 400mm plate tance of 150 mm from the 5 (510) **4** (408) 3 (306) 2 (204) 1 (102) 2 3 4 5 6 7 8 (15) (29) (44) (58) (73) (87) (102) (116)

Max.12 bar








Silent Air Boy LOW NOISE LEVEL AND UNBLOCKABLE OR WITH PRESSURE STOP

With a low noise level, our Silent Air Boy is ideal for you, who wants less noise during work.

Moreover, the blowgun is unblockable, which ensures that the airflow continues through the sides of the pipe, if the tip is blocked.

The blowgun has infinite adjustment and is avail-able with volume control or pressure stop. Silent Air Boy

comes with bent pipe or straight pipe in different lengths. It is suitable for cleaning, blow-off tasks and drying in narrow places.

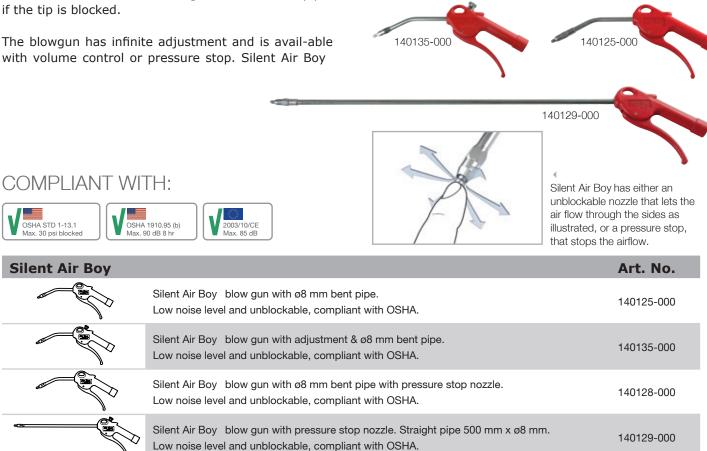

Materials	
Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube and shaft	Steel, electro-galvanized
Spring	Hardened spring wire

l/min.(cfm) / bar (psi

8

(87) (102) (116)

Flow

600

500

400

300

200


100


2 3 4 5 6

(44) (58) (73)

(15) (29)

i)	Noise level dB / bar (ps	i)
	100 Messured at a distance of 1m	
	90 - Messured at a distance of im to the side of the nozzle	
	70 71.6 74	
	60 -	
	1 2 3 4 5 6 7 8 (15) (29) (44) (58) (73) (87) (102) (116)	

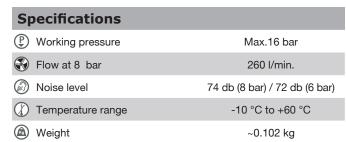



л






Air Boy Thrust BLOW GUN WITH VERY HIGH AIRFLOW

Air Boy Thrust is ideal for work where extremely high airflow is needed. The Thrust nozzle increases the airflow by 100 % because of the venturi principle and is at the same time unblockable. The blow gun is available in different lengths.

In selected models an angle nozzle or directional side nozzle is enclosed, which is perfect for blowing around corners, clea-


ning the inside of cylindrical objects and other hard to reach places. The pipes with extra lengths are equipped with an insulated handle, that protects the hand against cold air.

The Thrust nozzle is compliant with the following directives: OSHA directive STD 1-13.1 – Max. 30 psi when blocked.

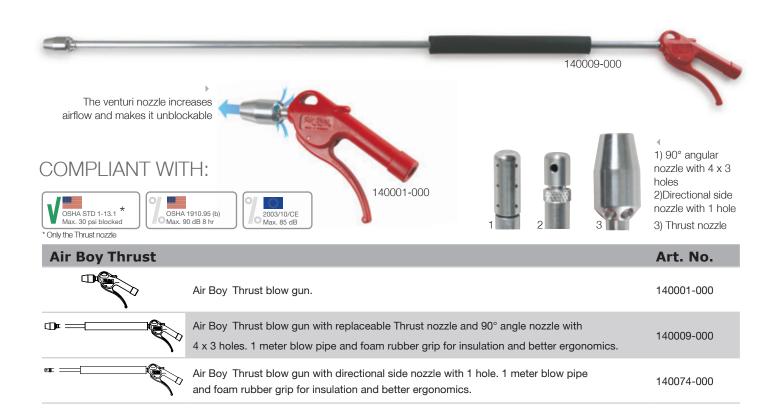

Materials	
Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube and shaft	Aluminium
Spring	Hardened spring wire

Flow	I/min.(cfm) / bar (psi)								
600 (21.19) 500 (17.66)						45	0	600	,
400 - (14.13) 300 - (10.59) 200 -									
(7.06) 100 (3.53)									
	1 (15)	2 (29)	3 (44)	4 (58)	5 (73)	6 (87)	7 (102)	8 (116)	



Specifications


Flow at 8 bar

Noise level

Weight

() Temperature range

(iii)



Max.12 bar

600 l/min.

98.2 db (8 bar) / 101.5 dB (6 bar)

-10 °C to +80 °C

~0.118 - 0.320 kg





DIY

Air Boy Turbo is assembled with a ByPass venturi nozzle, which makes the blow gun unblockable and increases the airflow by 100 %. The ByPass nozzle absorbs air through the sides, which makes the airflow extra high. The air flows through the holes in the side if the tip is blocked.

The blow gun is produced with a bent pipe. The nozzle is also available separately and can be assembled with an Air Boy Classic blow gun. Note: When assembled, it can not be removed.



2003/10/CE Max. 85 dB



õ




Air Boy Turbo increases airflow using the ByPass venturi nozzle. It has an unblockable nozzle that lets the air flow through the sides if the tip is blocked.

Art. No.

V OSHA STD 1-13.1 Max. 30 psi blocked


COMPLIANT WITH:


Air Boy Turbo



Air Boy Turbo blow gun with ByPass nozzle - ø8 mm bent pipe. High airflow & unblockable. Compliant with OSHA.	140111-000
ø6 mm ByPass nozzle. Note: When assembled, it can not be removed.	144115
ø8 mm ByPass nozzle. Note: When assembled, it can not be removed.	144116

Materials	
Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube and shaft	Steel, electro-galvanized
Spring	Hardened spring wire






Specifications (P) Working pressure Max.16 bar (P) Flow at 8 bar 300 l/min. (P) Noise level 85.4 db (8 bar) / 83.7 db (6 bar) (P) Temperature range -10 °C to +80 °C

Weight

Blowing force Newton (g) / bar (psi)

~0.115 kg





SAFETY BLOW GUN WITH AUTOMATIC PRESSURE REDUCTION

Safety Air Boy blow gun is equipped with an auto matic pressure reduction. If the tip is blocked, the air pressure will automatically be reduced to a lower pressure. Thereby, the blow gun can still be used to some extent if it is blocked. This will also avoid damages of the blow gun. The blow gun is available with an air pressure reduction to max. 2.0 bar or max. 3.5 bar.





Safety Air Boy blow gun with ø8 mm bent pipe - 2.0 bar. If the tip is blocked, the pressure is reduced to max. 2.0 bar. Compliant with OSHA.	140161-000
Safety Air Boy blow gun with ø8 mm bent pipe - 3.5 bar. If the tip is blocked, the pressure is reduced to max. 3.5 bar. Compliant with OSHA.	140171-000

Specifications (P) Working pressure

Noise level at 8 bar


() Temperature range


Flow at 8 bar

(a) Weight

Materials	
Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube and shaft	Steel, electro-galvanized
Spring	Hardened spring wire

Flow I/min.(cfm) / bar (psi)		
600 (21.19) 500 (17.66) 400 (14.13) 300 (10.59) 200 (7.06) 100 (3.53)	220 (3.5 bar) 220 (3.5 bar) 140 (2.0 bar)	
	1 2 3 4 5 6 7 8 (15) (29) (44) (58) (73) (87) (102) (116)	





Max.16 bar

140 l/min. (2.0) / 220 l/min. (3.5)

68 db (2.0) / 76,5 db (3.5 bar)

-10 °C to +80 °C

~0.130 kg



Air Boy Non Scratch PREVENTS SCRATCHING AND DAMAGE


It is easy to make scratches and damages on sensitive surfaces with a blow gun. Air Boy Non Scratch is designed to meet this problem. The blow gun is assembled with a rubber nozzle at the end of the blow pipe in order to protect sensitive surfaces during work.


Air Boy Non Scratch can be adjusted to your needs since it is available with a straight pipe, a bent pipe or as a junior model without a pipe.




		AIL NO.
Ø	Air Boy Non Scratch blow gun with ø8 mm bent pipe & rubber nozzle.	140021-000
	Air Boy Non Scratch blow gun with ø6 mm bent pipe & rubber nozzle	140022-000
Σ	Air Boy Non Scratch Junior blow gun with rubber nozzle	140023-000
	Extra rubber nozzle to ø8 mm pipes. Can be used on Air Boy Classic.	144124
	Extra rubber nozzle to ø6 mm pipes. Can be used on Air Boy Classic.	144194

Materials	
Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube and shaft	Steel, electro-galvanized
Spring	Hardened spring wire





Specifications			
P Working pressure	Max.16 bar		
Flow at 8 bar	380 l/min.		
Noise level	85 db (8 bar) / 84 db (6 bar)		
() Temperature range	-10 °C to +80 °C		
Weight	~0.105 kg		








Jet Air Boy HIGH BLOWING FORCE, UNBLOCKABLE AND LOW NOISE LEVEL

Jet Air Boy has many qualities that makes it a very user-friendly blow gun. The blow gun is assembled with a flat nozzle that has a high blowing force, but also a low noise level. It is unblockable at the same time.



COMPLIANT WITH:

OSHA STD 1-13.1 Max. 30 psi blocked OSHA 1910.95 (b) Max. 90 dB 8 hr 2003/10/CE Max. 85 dB The airflow is spread out, which makes the blow gun impossible to block. Jet Air Boy comes with infinite adjustment through the handle and a model also including volume control. The flat nozzle is produced in POM or as an accessory in the more heat resistant ULTEM1000 material.

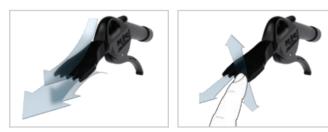


The flat nozzle on Jet Air Boy spreads out the airflow and gives a high blowing force. The nozzle makes Jet Air Boy unblockable.


Jet Air Boy		Art. No.
	Jet Air Boy blow gun with black flat POM nozzle. Low noise level. Unblockable.	140026-134
	Jet Air Boy blow gun with black flat POM nozzle & air volume control. Low noise level. Unblockable.	140027-134
	Jet Air 1 nozzle - black POM. Low noise level and unblockable.	141000-000
	Jet Air 2 nozzle - grey ULTEM1000 - 200°C. Low noise level and unblockable.	141001-000

Materials	
Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube and shaft	Acetal plastic, Steel
Spring	Hardened spring wire

Flow I/min.(cfm) / bar (psi) 600 (21 19) 500 (17,66) 400 300 200 (3.53) 2 3 4 5 6 7 8 (15) (29) (44) (58) (73) (87) (102) (116)



Specifications	
P Working pressure	Max. 8 bar
🛞 Flow at 8 bar	580 l/min.
Noise level	81.5 db (8 bar) / 78 db (6 bar)
Temperature range	-10 °C to +80 °C
le Weight	~0.095 kg



Jet Air Boy 15





Air Boy Inflating guns are easy to use for inflating tyres or balls as well as for cleaning in narrow places.





Air Boy Inflating Guns EASY INFLATION OF TYRES AND BALLS

Air Boy inflating guns are good alternatives to handheld bicycle pumps when balls, bicycle tires, baby carriage tyres or similar has to be inflated. You are ensured the well-known quality from the Air Boy brand.

The inflating guns are extremely functional and reliable. The infinite adjustment and easy activation of the handle makes them easy to use regardless of age. The inflating guns are available in different varieties that make them fit exactly your valves or footballs.



140119-000

Air Boy Universal inflating gun with nozzle suitable for cars and mountainbikes with Schrader valves.



140108-000 Air Boy ball inflating gun with inflating needle is suitable for balls and narrow spaces.



140118-000 Air Boy Universal inflating gun with nozzle suitable for bicycles with Dunlop and Presta valves.

Air Boy Inflating g	guns	Art. No.
	Air Boy Ball inflating gun incl. inflating needle. Also suitable for work in confined spaces.	140108-000
	Air Boy Universal inflating gun for bicycles. ø8 mm bent tube. Suitable for "Dunlop" and "Presta" valves.	140118-000
	Air Boy Universal inflating gun for cars, prams, mountainbikes etc. ø8 mm bent tube. Suitable for "Schrader"valves.	140119-000

Accessories	Art. No.
Rubbercone for 140118-000	150203
Brass sleeve for 140118-000	150202
Extra inflating needle for Air Boy ball inflating gun 140108-000	140297A

Materials	
Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube and shaft	Steel, electro-galvanized
Spring	Hardened spring wire

Specifications	
P Working pressure	Max. 16 bar
Temperature range	-10 °C to +60 °C
Weight	0.100 - 0.126 kg

Air Boy accessories CHANGE YOUR BLOW GUN WITH DIFFERENT NOZZLES

It is easy to change the specifications on your blow gun and adjust it to your requirements with replaceable nozzles. Find nozzles for angular blowing, protective shields, non scratch nozzles etc.



5

Protective shield for mounting on blow pipes. Protects against backscattering of chips etc. Air Boy 90° Angle Nozzle. Ideal for cleaning insi - de cylindrical objects or hard to reach places.

Air Boy Push-in nozzles are easily mounted by pressing it on the tip of the blow pipe. Remove by pressing the plastic collar forward and push the nozzle off.

Push-in nozzles for Air Boy		Art. No.
	Air Boy 35 mm push-in rubber nozzle protects sensitive surfaces. Available for Air Boy Classic blow guns with ø8 mm pipe. Easy to mount and dismount.	144502
	25 mm push-in rubber nozzle protects delicate surfaces. Possibel to clean hoses up to 7/8" by blowing through. Available for Air Boy Classic blow guns with ø8 mm pipe. Easy to mount and dismount.	144501
	15 mm push-in rubber nozzle protects delicate surfaces. Easy to mount and dismount. Available for Air Boy Classic blow guns with ø8 mm pipe.	144500
	Air Boy Thrust nozzle with Push-in. The nozzle increases the airflow. Unblockable (OSHA). Available for Air Boy Classic blow guns with ø8 mm pipe.	144122
	Air Boy Silent nozzle with Push-in. Low noise level and unblockable (OSHA). Available for Air Boy Classic blow guns with ø8 mm pipe.	144525
\bigcirc_{\circ}°	Air Boy 90° Angle Nozzle. Ideal for cleaning inside cylindrical objects or hard to reach places. The nozzle can easily be mounted or removed. Available for Air Boy Classic blow guns with ø8 mm pipe.	144177
	Air Boy Push-in nozzle kit: 25 mm rubber nozzle, thrust nozzle and silent nozzle. Available for Air Boy Classic blow guns with ø8 mm pipe.	144550
	Air Boy Nozzle kit: 35 mm push-in rubber nozzle (144502), push-in Thrust nozzle (144122), push-in Silent nozzle (144525), push-in Angle nozzle (144177) and chip shield (144180). Available for Air Boy Classic blow guns with ø8 mm pipe.	144800-000

Other accessories	s for Air Boy Classic	Art. No.
(A) (A)	Chip shield. Fits Air Boy ø8 mm pipe. Made of ABS plastic, brass and nitrile.	144180
	Chip shield. Fits Air Boy ø6 mm pipe. Made of ABS plastic, brass and nitrile.	144181
	Extra Non Scratch rubber nozzle to ø8 mm pipes.	144124
	Extra Non Scratch rubber nozzle to ø6 mm pipes.	144194
	ø8 mm ByPass nozzle. Note: When assembled, it can not be removed.	144116
	ø6 mm ByPass nozzle. Note: When assembled, it can not be removed.	144115

PROFESSIONAL TOOLS FOR COMPRESSED AIR

In this catalogue you will find the assortment of Air Boy blow guns for compressed air and accessories for blow guns. Plant also produces tools, quick release couplings and accessories for compressed air like hoses, fittings etc. for professional use. Contact us to get the catalogue.

OEM OPTION

PRIVATE LABEL OPTION

We can put your company name, brand....on these

MADE IN DENMARK



Tel: 505-550-6501 Fax: 505-814-5778 Email: sales@agstech.net Web: www.agstech.net

